**RPW200SP/NC** Premium Rental Range







# **INDUSTRIAL RANGE** POWER, RELIABILITY AND WARRANTY



Made Exclusively in Europe by AEM for Blue Diamond Machinery



# **Premium Rental Range Key Features**


# 200 KVA 1500 RPM 400/230V. 50 HZ.

These units have been customised for the Australian rental market, including:



### Massive 25.3 Hour Run time! (Based on 75 percent load @ 33.6L/hr 850L capacity)

Quiet Operation - Noise Level only 72dB ±2 at 7m





COMAP MRS16 module RS232-485
Premium Sound Proofing
Low coolant sensor
Emergency stop on control panel
Fuel level gauge on tank
MCB Lockable
Hour meter
Battery disconnector LS13001-01
Priming high end paint canopy
Galvanised canopy
4 pole breaker
Electronic differential
AVR located on control panel
BUSBAR (30-700KVA)
Door safety micro-switch for disconnecting
General circuit breaker when busbar door opening
Recess for IP66 Australian sockets
Battery disconnector
Sealed frame with draining liquids
Screwed caps
Removable high capacity fuel tank
Compartmentalised / subdivided fuel tank to avoid fuel movements in transport
Opening box for easy cleaning of fuel tank
6 ways electrical valve with external quick plugs of fuel 1/2"
Forklift holes
Anti shock protection for manipulating with forklift
Perforated sheet covering the whole canopy internally
Water filter separator radiator access door





Made Exclusively in Europe by AEM for Blue Diamond Machinery



# **Premium Rental Range Specifications**

# 200 KVA 1500 RPM 400/230V. 50 HZ.

## 200 KVA · 50 Hz Generator

#### Engine

Perkins 1106A -70TAG4



#### Alternator

Stamford - UC1274H



Power	PRP	LTP
Power in kVA	200	220
Power in KW	160	176

General Specifications				
Noise Level	72dB ±2 at 7m			
Revolutions [RPM]	1500			
Voltage(s) [V]	400/230			
Frequency [Hz]	50			
Cos (Ø) [0-1]	0.8			

#### Legend

• PRP (Prime Power): Maximum power supplied by the generating set for continuous periods of time and with variable loads.

• LTP (Limited Time running Power): Maximum power supplied by the generator for short and punctual emergency use periods. Generally about 10% more power of the PRP.

• KVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 KVA is equivalent to approximately 0.8 kilowatts power.



## Massive 25.3 Hour Run time!

(Based on 75 percent load @ 33.6L/hr 850L capacity)

Quiet Operation - Noise Level only 72dB ±2 at 7m

Consumption	Litres/hour	
25%	-	
50%	22	
75%	33.6	
100%	43.1	
100%	43.1	

Measurements	Weight	
Length (L) [mm]	3890	
Width (W) [mm]	1180	
Height (H) [mm]	2275	
Volume [m3]	10.4	
Weight [KG.]	3350	
Fuel tank [L]	850	
Autonomy 75% [h]	25.3	





50 HZ.

Made Exclusively in Europe by AEM for Blue Diamond Machinery



## **Premium Rental Range Control System**

# 200 KVAModel: RPW200SP/NC1500 RPM200 KVA • 50 Hz Generator400/230V.400/230V.



# InteliLite MRS 16 Controller for single gen-set applications

#### Product description

- Single Gen-set controller for Prime-power applications
- · Direct communication with EFI engines
- $\cdot$  Total remote monitoring and control

#### **Key Features**

- · 5 languages in the controller & translator functionality
- · 3 levels of password
- · 3 sets of alternative configurations
- Magnetic pickup
- · ECU support & Tier 4 Final ready
- STAGE V support
- Cloud-based monitoring and control via
  WebSupervisor
- · Geo-Fencing and tracking via WebSupervisor
- Plug-in module concept for more capabilities (RS232, RS485, Ethernet, GPRS, 4G/LTE, Modbus, SNMP, emails, SMS, I/Os)
- · 2 slots for plug-in modules
- · CAN modules support
- Power over USB for controller's adjustment
- In-built PLC, complemented with a monitoring/debugging tool
- 8 binary outputs, 8 binary inputs, 4 analog inputs
- · 2 high-current binary outputs



- $\cdot$  Run Hours source selector
- $\cdot$  Activation of outputs based on
  - inputs/power/temperature
- Real time clock
- $\cdot$  Multipurpose flexible timers (also for rental)
- · Comprehensive history log with up to 350 events
- Dual Application: control of Gen-set, transfer switch and alternation
- · 3 maintenance timers (counting even under zero)
- · Possibility to disable protections
- Modbus register mapping possibility
- · Adjustable Main Screen
- $\cdot$  A version for low temperature is also available







Made Exclusively in Europe by AEM for BLUE OLAMOND **Blue Diamond Machinery** 



# **Premium Rental Range Canopy Design**




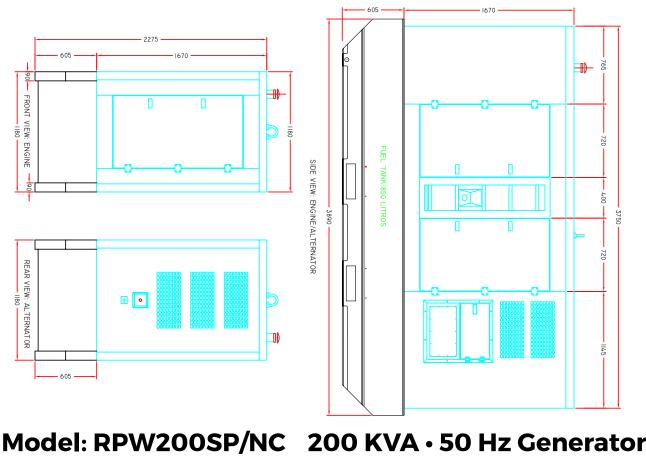

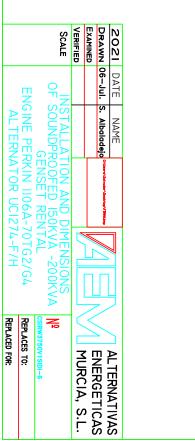

BLUE 🔷 DIAMOND

MACHINERY

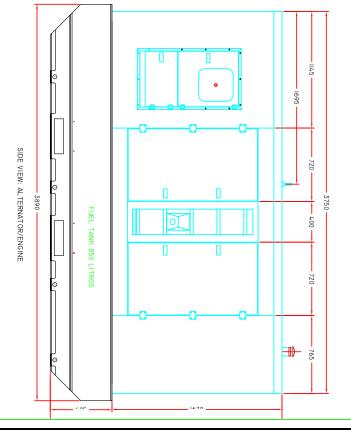



1300 998 647