RPW60SP/NC Premium Rental Range

Certified company:





INDUSTRIAL RANGE POWER, RELIABILITY AND WARRANTY



Made Exclusively in Europe by AEM for Blue Diamond Machinery



Premium Rental Range Key Features

60 KVAModel: RPW60SP/NC1500 RPM60 KVA • 50 Hz Generator400/230V.50 HZ.

These units have been customised for the Australian rental market, including:



Massive 47.6 Hour Run time! (Based on 75 percent load @ 10.5L/hr 500L capacity)

Quiet Operation - Noise Level only 67dB ±2 at 7m



COMAP MRS16 module RS232-485
Premium Sound Proofing
Low coolant sensor
Emergency stop on control panel
Fuel level gauge on tank
MCB Lockable
Hour meter
Battery disconnector LS13001-01
Priming high end paint canopy
Galvanised canopy
4 pole breaker
Electronic differential
AVR located on control panel
BUSBAR (30-700KVA)
Door safety micro-switch for disconnecting
General circuit breaker when busbar door opening
Recess for IP66 Australian sockets
Battery disconnector
Sealed frame with draining liquids
Screwed caps
Removable high capacity fuel tank
Compartmentalised / subdivided fuel tank to avoid fuel movements in transport
Opening box for easy cleaning of fuel tank
6 ways electrical valve with external quick plugs of fuel $1/2^{"}$
Forklift holes
Anti shock protection for manipulating with forklift
Perforated sheet covering the whole canopy internally
Water filter separator radiator access door





Made Exclusively in Europe by AEM for Blue Diamond Machinery



Premium Rental Range Specifications

60 KVA Model: RPW60SP/NC 1500 RPM 400/230V. 50 HZ. 50 HZ.

60 KVA • 50 Hz Generator

Engine

Perkins 1103A -33TG2



Alternator

Stamford - S1L2Y1

STAMFORD

Power	PRP	LTP
Power in kVA	60	66
Power in KW	48	52.8

General Specifications		
Noise Level	67dB ±2 at 7m	
Revolutions [RPM]	1500	
Voltage(s) [V]	400/230	
Frequency [Hz]	50	
Cos (Ø) [0-1]	0,8	

Legend

• PRP (Prime Power): Maximum power supplied by the generating set for continuous periods of time and with variable loads.

• LTP (Limited Time running Power): Maximum power supplied by the generator for short and punctual emergency use periods. Generally about 10% more power of the PRP.

• KVA (Kilovolt-ampere): The most common unit for measuring the power of a generator. 1 KVA is equivalent to approximately 0.8 kilowatts power.



Massive 47.6 Hour Run time!

(Based on 75 percent load @ 10.5L/hr 500L capacity) Quiet Operation - Noise Level only 67dB ±2 at 7m

Litres/hour
-
7.3
10.5
14.1

Measurements	Weight
Length (L) [mm]	2690
Width (W) [mm]	1100
Height (H) [mm]	1805
Volume [m3]	5.3
Weight [KG.]	1800
Fuel tank [L]	500
Autonomy 75% [h]	47.6





60 KVA

1500 RPM

400/230V.

50 HZ.

Made Exclusively in Europe by AEM for Blue Diamond Machinery



Premium Rental Range Control System

Model: RPW60SP/NC 60 KVA • 50 Hz Generator



InteliLite MRS 16 Controller for single gen-set applications

Product description

- Single Gen-set controller for Prime-power applications
- Direct communication with EFI engines
- \cdot Total remote monitoring and control

Key Features

- \cdot 5 languages in the controller & translator functionality
- · 3 levels of password
- · 3 sets of alternative configurations
- Magnetic pickup
- · ECU support & Tier 4 Final ready
- STAGE V support
- Cloud-based monitoring and control via
 WebSupervisor
- · Geo-Fencing and tracking via WebSupervisor
- Plug-in module concept for more capabilities (RS232, RS485, Ethernet, GPRS, 4G/LTE, Modbus, SNMP, emails, SMS, I/Os)
- · 2 slots for plug-in modules
- · CAN modules support
- Power over USB for controller's adjustment
- In-built PLC, complemented with a monitoring/debugging tool
- 8 binary outputs, 8 binary inputs, 4 analog inputs
- \cdot 2 high-current binary outputs



- \cdot Run Hours source selector
- \cdot Activation of outputs based on
 - inputs/power/temperature
- Real time clock
- Multipurpose flexible timers (also for rental)
- \cdot Comprehensive history log with up to 350 events
- Dual Application: control of Gen-set, transfer switch and alternation
- · 3 maintenance timers (counting even under zero)
- Possibility to disable protections
- Modbus register mapping possibility
- · Adjustable Main Screen
- \cdot A version for low temperature is also available







765

765


765

765

2550 1020

2550 1020

Premium Rental Range Canopy Design

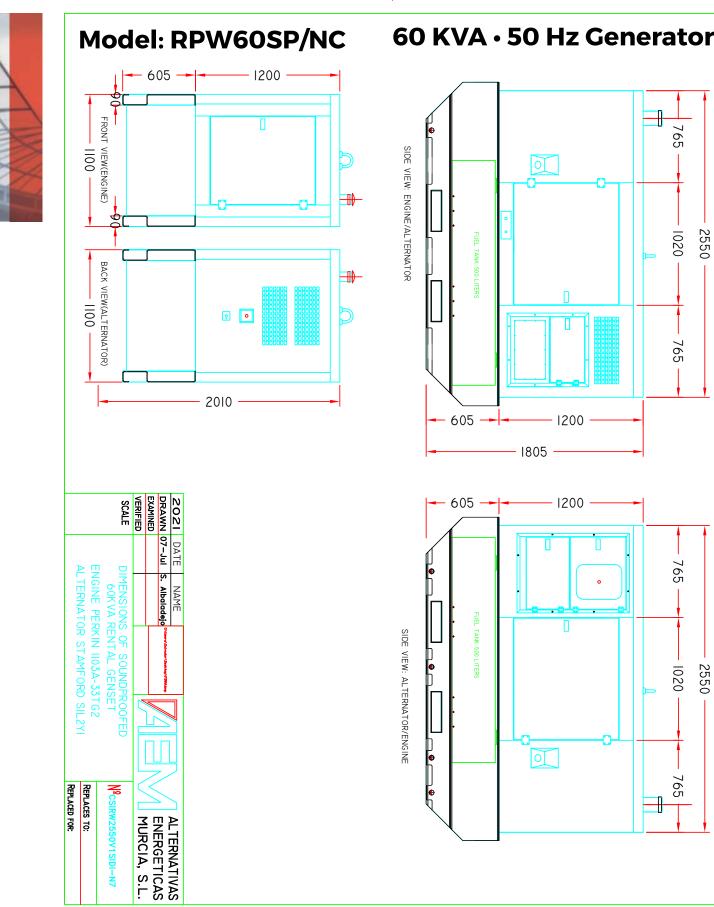



Aω

