City Silent LED - Mobile

Model: ENV4UYMOBILE

LUE 1300 998 647

EnviroLED

Lighting Towers

4 x 320W

delivering super bright light visibility for road works and building sites




EnviroLED

thellowers

City Silent Urban LED Mobile 4 x 320W Model ENV4UYMOBILE

KEY FEATURES

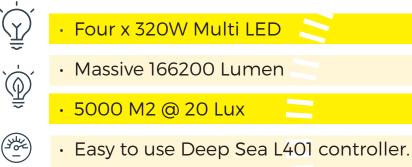

 Super Fuel Efficient Japanese Yanmar engine with 200 Hour Run Time

MADE IN ITALY

IN O

Italian made for tough Australian conditions, delivering super bright light for continuous night work in construction and civil works.



1111

Lighting Towers Technical Specifications

Rated frequency / voltage50 Hz / 230 VRated Power3.5 kWOperating temperature-30/-50°CSound level61 dB @ 7 mControl unitDeep Sea L401 MKIIEngineYannar ZTNV70Speed1500 rpmCoolantLiquidCylinders2EnlisionsStage VAlternatorInz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/-5%Auxillary power0.5kVAFuel Consumption0.5t I/hTank1101 Inet/1201 grossFuelDieselRunning time200 hGalvanized mast height8.5 mKotation350°Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart Auxiders in StolaryOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Performance data	
Operating temperature-30/+50°CSound level61 dB @ 7 mControl unitDeep Sea L401 MKIIEngineYanmar 2TNV70Speed1500 rpmCoolantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/-5%Auxillary power0.5 kVAFuel Consumption0.55 l/hTank110 l net/ 120 l grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart AMOSS kit Battery isolatorOptional included:Electric tilting headShipment235x147x240 cmWeight850 kgTurck10	Rated frequency / voltage	50 Hz / 230 V
Sound level61 dB @ 7 mControl unitDeep Sea L401 MKIIEngineYanmar 2TNV70Speed1500 rpmCoolantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxilary power0.5kVAFuel Consumption0.55 l/hTank1101 net/ 1201 grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMS Skit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Rated Power	3.5 kW
Control unitDeep Sea L401 MKIIEngineYanmar 2TNV70Speed1500 rpmCoolantLiquidColantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0,55 l/hTank110 l net/ 120 l grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Operating temperature	-30/+50°C
EngineYanma' 2TNV70Speed1500 rpmCoolantLiquidCoolantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.551/hTank110 Inet/ 120 IgrossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1ConopyPowder coating paintOptionalWeekly timer Autostart Grid/engine selector Daylight sensor with Autostart ArdNOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Sound level	61 dB @ 7 m
Speed1500 rpmCoolantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.55 l/hTank110 Inet/ 120 I grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1ConopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Control unit	Deep Sea L401 MKII
CoolantLiquidCylinders2EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.551/hTank110 Inet/ 120 I grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Engine	Yanmar 2TNV70
Cylinders2EmissionsStage VAlternatorLinz AlumenBated outlet3.5 k/ARegulationBrushlessVoltage accurancy+/- 5%Auxilary power0.5 k/AFuel Consumption0.5 k/ATank110 Inet/ 120 I grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headStipment235x147x240 cmWeight850 kgTruck10	Speed	1500 rpm
EmissionsStage VAlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.5kVATank110 Inet/ 120 I grossFuel Consumption0.5kVAGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4+1CanopyPowder coating paintOptional included as standard:Wekly timer Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Coolant	Liquid
AlternatorLinz AlumenRated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0,55 l/hTank110 l net/ 120 l grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1ConopyPowder coating paintOptional included as standard:Weekly timer Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Cylinders	2
Rated outlet3.5 kVARegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.55 l/hTank1101 net/1201 grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4+1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:235x147x240 cmWeight850 kgTruck10	Emissions	-
RegulationBrushlessVoltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.55 1/hTank1101 net/ 1201 grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Alternator	Linz Alumen
Voltage accurancy+/- 5%Auxillary power0.5kVAFuel Consumption0.55 l/hTank110 1 net/ 120 1 grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart MOSS kit Battery isolatorOptional not included:Etcric tilting headShipment235x147x240 cmWeight850 kgTruck10	Rated outlet	3.5 kVA
Auxillary power0.5kVAFuel Consumption0.55 l/hTank110 I net/ 120 I grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Regulation	Brushless
Fuel Consumption0.55 l/hTank1101 net/1201 grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptional included as standard:Weekly timer Autostart Grid/negine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10		
Tank1101net/1201grossFuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalUOptional included as standard:Weekly timer Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10		
FuelDieselRunning time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalUOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	· · ·	
Running time200 hGalvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4+1CanopyPowder coating paintOptionalUure Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10		
Galvanized mast height8.5 mLifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalOptionalOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10		
Lifting systemHydraulicRotation350 °Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalUOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10		
Rotation350 °Wind resistance110 km/hTrailerRoad-towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalUOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Galvanized mast height	8.5 m
Wind resistance110 km/hTrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalVeekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Lifting system	Hydraulic
TrailerRoad -towed trailerTyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Rotation	350 °
Tyres185/70R13BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipmentDimension235x147x240 cmWeight850 kgTruck10	Wind resistance	110 km/h
BasementBunded base 120%Stabilizers4 + 1CanopyPowder coating paintOptionalVeweelly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Trailer	Road -towed trailer
Stabilizers4 + 1CanopyPowder coating paintOptionalOptional included as standard:Optional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmWeight850 kgTruck10	Tyres	185/70R13
CanopyPowder coating paintOptionalPowder coating paintOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmDimension235x147x240 cmWeight850 kgTruck10	Basement	Bunded base 120%
OptionalOptional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmDimension235x147x240 cmWeight850 kgTruck10	Stabilizers	4 + 1
Optional included as standard:Weekly timer Autostart Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmDimension235x147x240 cmWeight850 kgTruck10	Сапору	Powder coating paint
Grid/engine selector Daylight sensor with Autostart AMOSS kit Battery isolatorOptional not included:Electric tilting headShipment235x147x240 cmDimension235x147x240 cmWeight850 kgTruck10	Optional	
ShipmentDimension235x147x240 cmWeight850 kgTruck10		Grid/engine selector Daylight sensor with Autostart AMOSS kit
Dimension235x147x240 cmWeight850 kgTruck10	Optional not included:	Electric tilting head
Weight 850 kg Truck 10	Shipment	
Truck 10	Dimension	235x147x240 cm
Truck 10	Weight	850 kg
Container 40"HC 10	Truck	10
	Container 40″HC	10



EnviroLED

Lighting Area (see MultiLed head on front page)

