



FG Wilson Diesel Generators



P65-5

65kVA Diesel Generator

3 Phase - Perkins Powered - Rental Spec

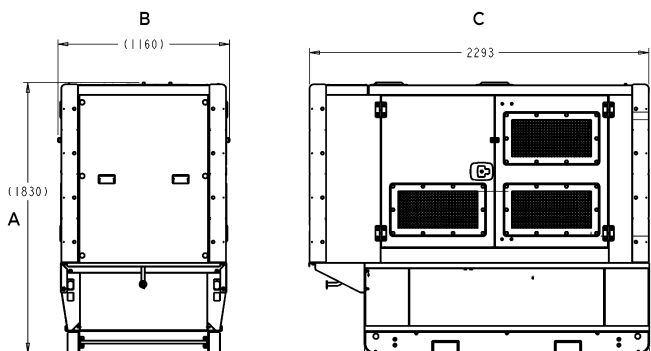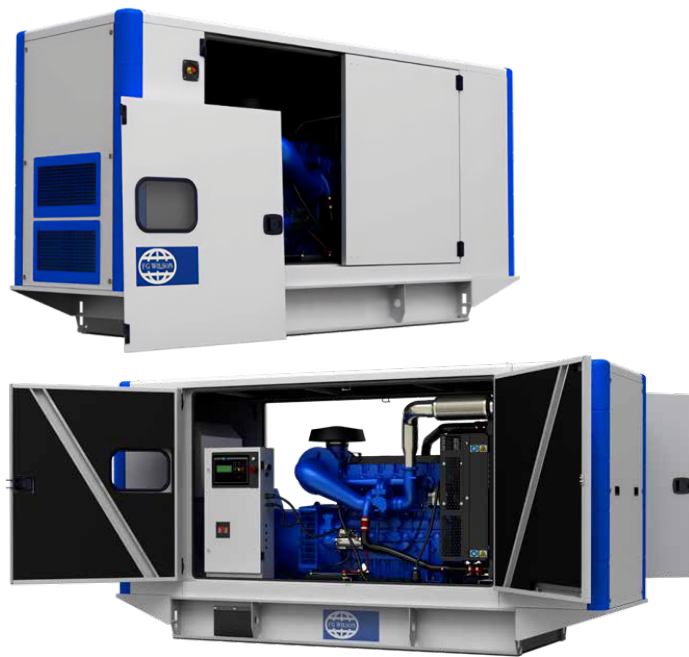

| | |
|-----------------------------|-----------------|
| Prime output: | 60kVA |
| Standby output: | 65kVA |
| Engine: | Perkins |
| Engine model: | 1103A-33TG2 |
| Alternator: | Leroy Somer |
| Control panel: | FG100 |
| Circuit breaker type: | 3 pole MCB/MCCB |
| No. of cylinders: | 3 |
| Recommended fuel: | Class A2 diesel |
| Sound level @ 7m: | 66dBA |
| Voltage: | 110-480 Volts |
| Emissions/fuel strategy: | Fuel optimised |
| Double banded tank | |
| Adjustable earth leakage | |
| M.E.N Link | |
| ComAp MRS 16 controller | |
| Lockable doors | |
| Controller and manual dials | |
| Lockable breaker | |

Dimension and Weights

| | |
|-----------------|--------|
| A: | 1830mm |
| B: | 1160mm |
| C: | 2293mm |
| Weight FGL: | 1205kg |
| Weight Marelli: | 1279kg |
| Weight LS: | 1207kg |
| Fuel Capacity: | 269L |

Warranty





12 months warranty from start up for prime application and 24 months from start up for standby application up to 500 hours.

Page 1


| SOCKET | DESCRIPTION | SIZE |
|--------|-------------------|-----------------|
| A | FUEL LEVEL SWITCH | 1" BSPP (F) |
| B | FUEL FILL | 2 1/2" BSPP (F) |
| C | FUEL GAUGE | 1 1/2" BSPP (F) |
| D | FUEL SUPPLY | 1/2" BSPP (F) |
| E | FUEL RETURN | 1/2" BSPP (F) |
| F | REMOTE SUPPLY | 1" BSPP (F) |
| G | REMOTE RETURN | 1" BSPP (F) |
| H | FUEL INLET | 1/2" BSPP (F) |
| I | FUEL INLET | 1/2" BSPP (F) |
| J | 3 WAY VALVE (AIR) | 1/2" BSPP (M) |
| K | 3 WAY VALVE (OIL) | 1/2" BSPP (M) |
| L | 3 WAY VALVE (OIL) | 1/2" BSPP (M) |
| M | LUBE OIL DRAIN | 1/2" BSPP (M) |

| WEIGHT WITH OIL & WATER | ALTERNATOR MODEL | ENGINE MODEL | GENERATOR MODEL |
|-------------------------|------------------|--------------|-----------------|
| 1437.71 / 3169.60 | LL1514P | 11D3K-33102 | D6550 |

•• APPROXIMATE VALUES ONLY ••

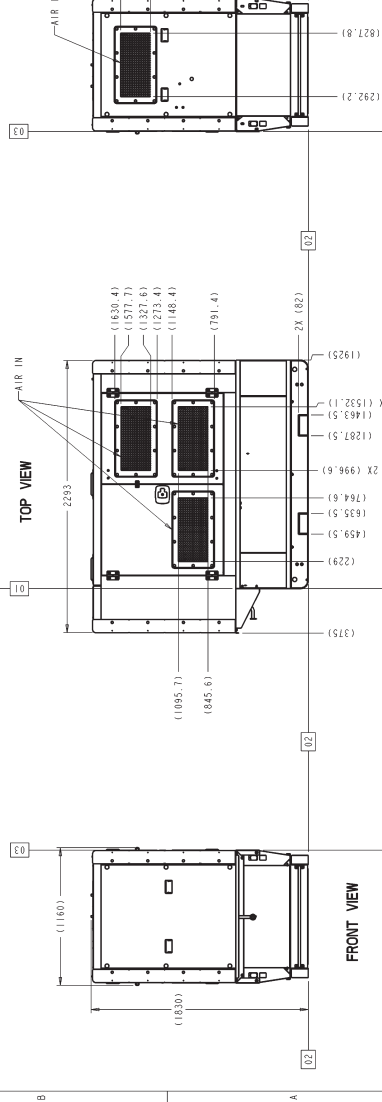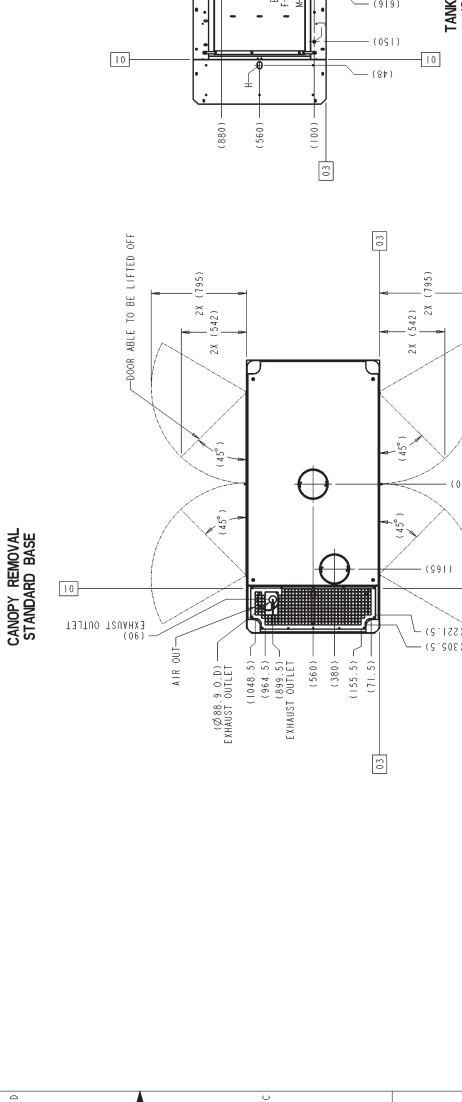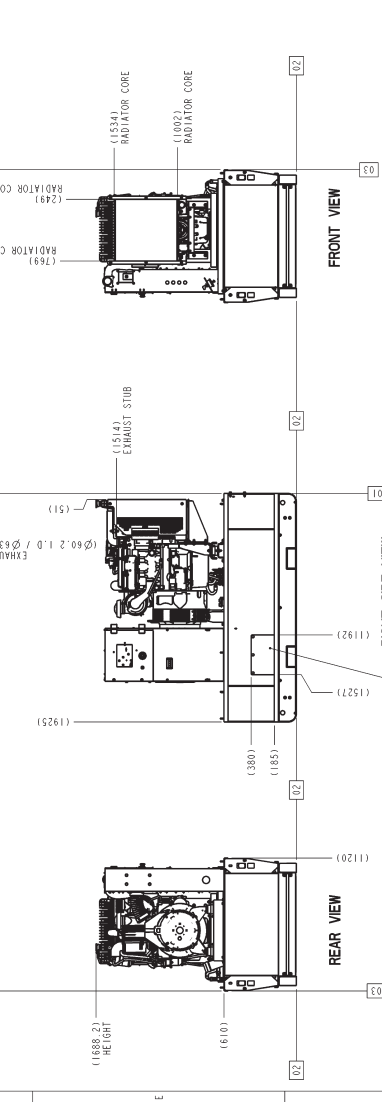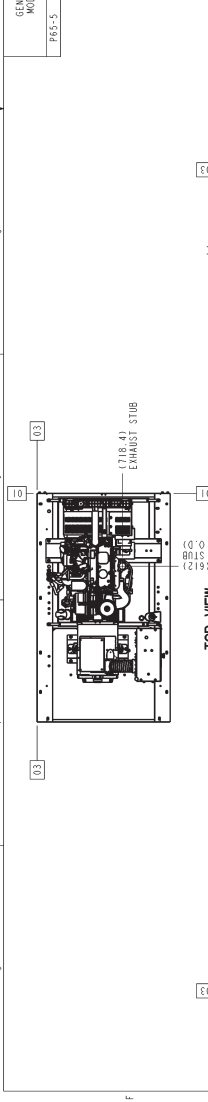

657-4306

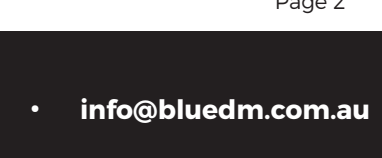

657-4306